


CW-BPF-869-894-E1-M1



Type:	Band Pass
Insertion Loss:	< 1.5 dB
Return Loss:	> 15 dB
Pass Band Ripple:	max 1 dB
Stop Bands:	> 50 dBc @ 400–849 and 914–4000 Mhz
Power Handling:	50 W avg. ja 500 W pead
Connectors:	SMA female

CW-BPF-869-894-E1-M1

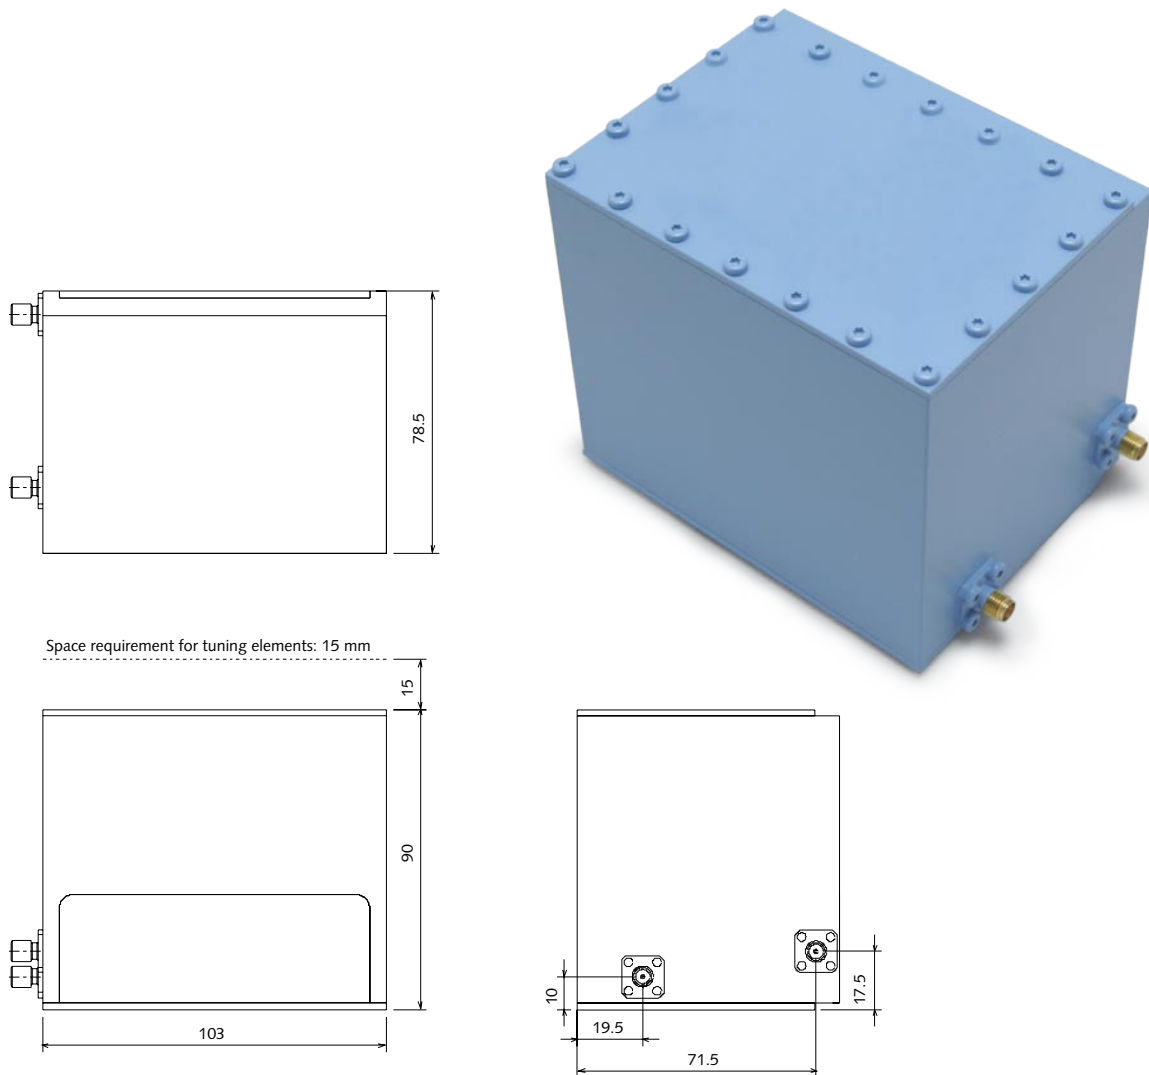