

Band Pass Filter 1845 - 1880 MHz



PN: CW-BPF-1845-1880-E1-M2


Connectors: SMA (f)

Dimensions (L x W x H):
128mm x 56mm x 59mm
(excluding connectors)

SPECIFICATIONS

Type:	Band Pass Filter
Pass Band:	1845 - 1880 MHz
Stop Bands:	1710 - 1830 and 1895 - 2170 MHz
Pass Band insertion Loss:	Typ < 1 dB
Stop Band rejection:	Typ > 60 dB

For other electrical or mechanical versions, please contact our sales.

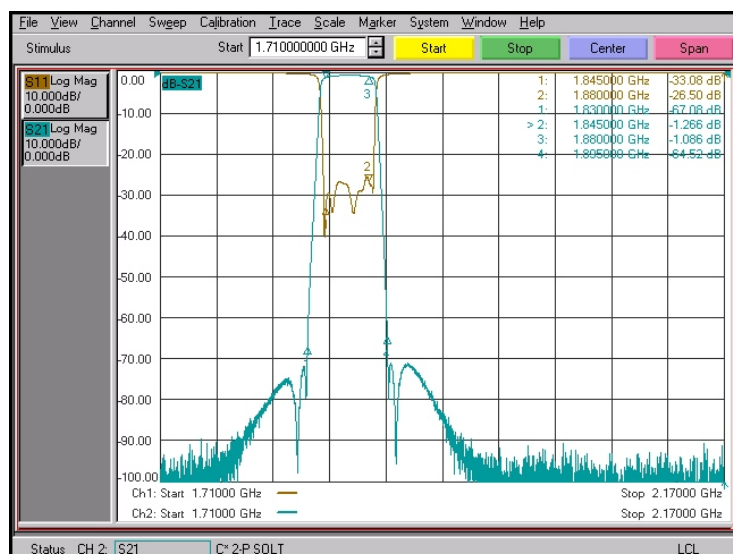

E-mail:
sales@creowave.com

Web address
www.creowave.com

Fax:
+358 40 88 29 465

Phone:
+358 40 86 86 300