



CW-BSF-2000-2020-E1-M2

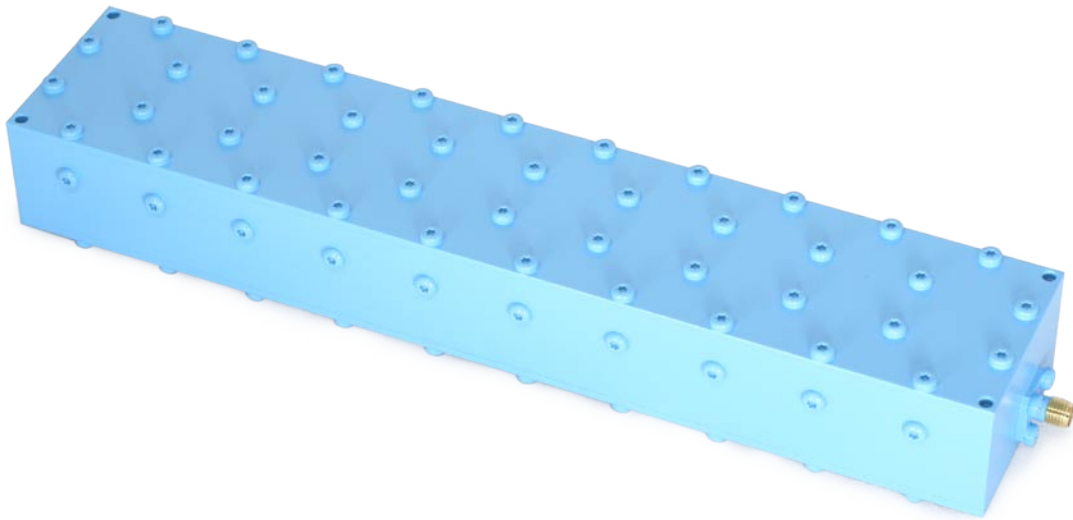

Type	Band Stop Filter
Pass Band	1–1990 and 2040–4000 MHz
Insertion Loss	< 4 dB
Return Loss	> 10 dB
Stop Band	> 70 dBc @ 2000–2020 MHz
Power handling	1 W avg. 10 W peak
Connectors	2 x SMA-F

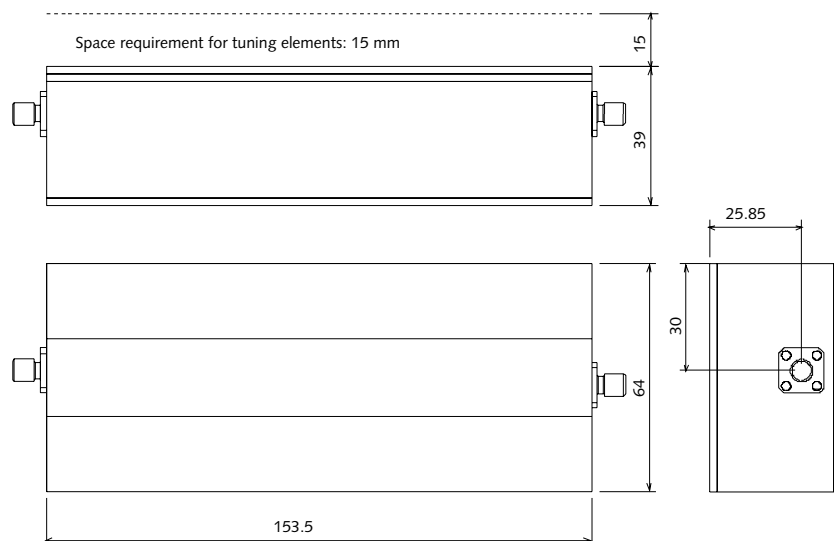

CW-BSF-2000-2020-E1-M2

