


Band Pass Filter 876 - 887 MHz



CREOWAVE

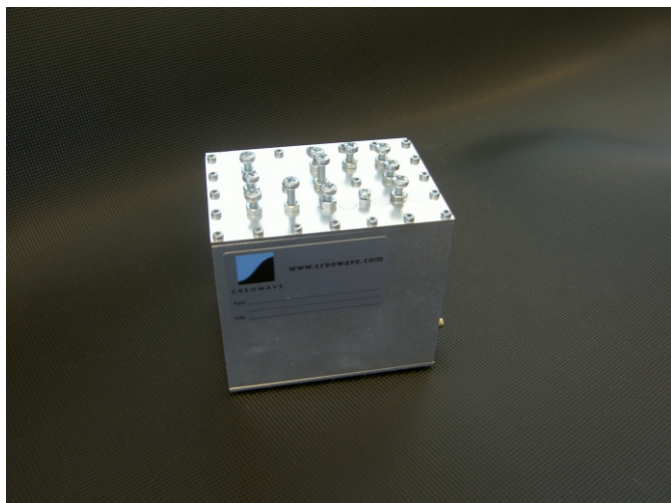

PN: CW-BPF-876-887-E1-M2


Connectors: SMA (f)

Dimensions (L x W x H):
105mm x 80mm x 90mm
(excluding connectors)

SPECIFICATIONS

Type:	Band Pass Filter
Pass Band:	876 - 887 MHz
Stop Bands:	DC - 866 and 897 - 13000 MHz
Pass Band insertion Loss:	Typ < 1 dB
Stop Band rejection:	Typ > 40 dB

For other electrical or mechanical versions, please consult our sales.

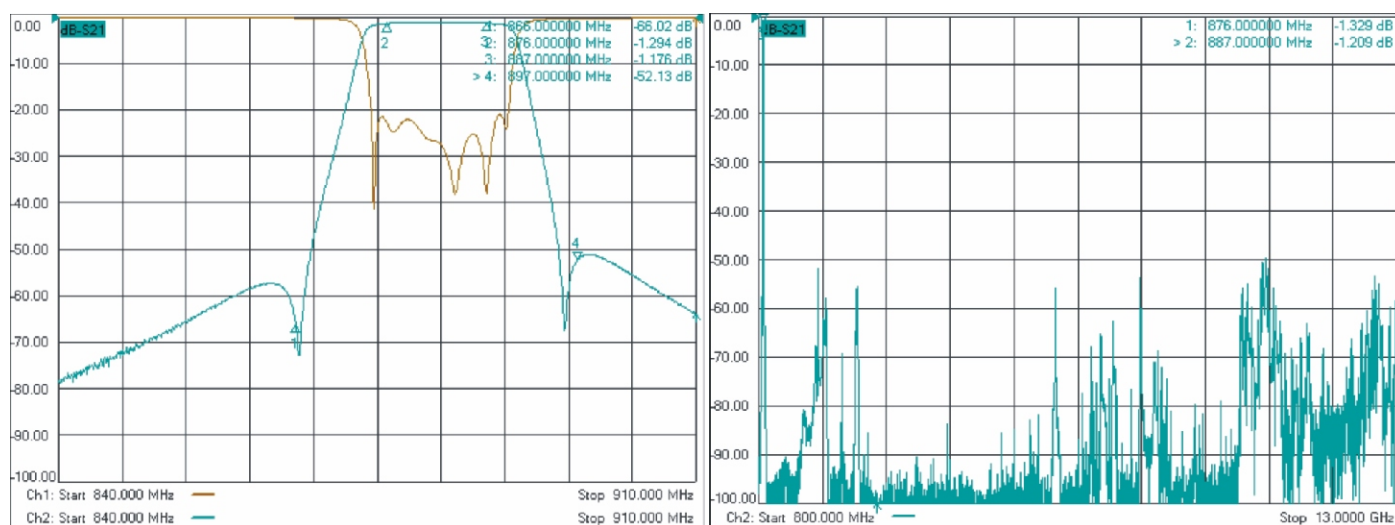

E-mail:
sales@creowave.com

Web address
www.creowave.com

Fax:
+358 40 88 29 465

Phone:
+358 40 86 86 300