


# Band Pass Filter

## 884 - 894 MHz



CREOWAVE

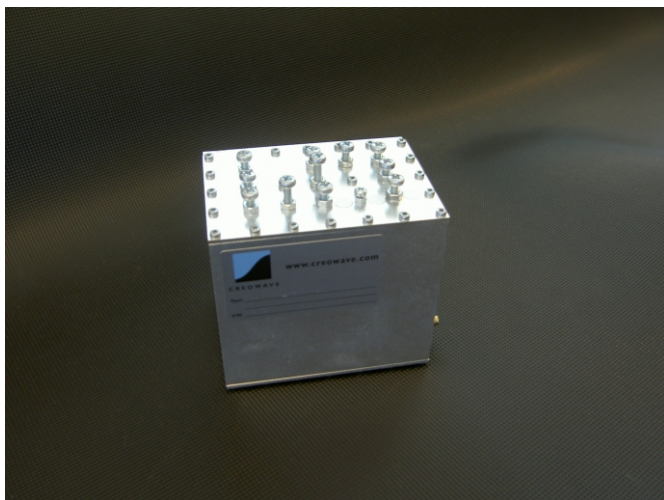

PN: CW-BPF-884-894-E1-M2


Connectors: SMA (f)

Dimensions (L x W x H):  
105mm x 80mm x 90mm  
(excluding connectors)

### SPECIFICATIONS

Type:	Band Pass Filter
Pass Band:	884 - 894 MHz
Stop Bands:	DC - 874 and 904 - 13000 MHz
Pass Band insertion Loss:	Typ < 1 dB
Stop Band rejection:	Typ > 40 dB

For other electrical or mechanical versions, please consult our sales.

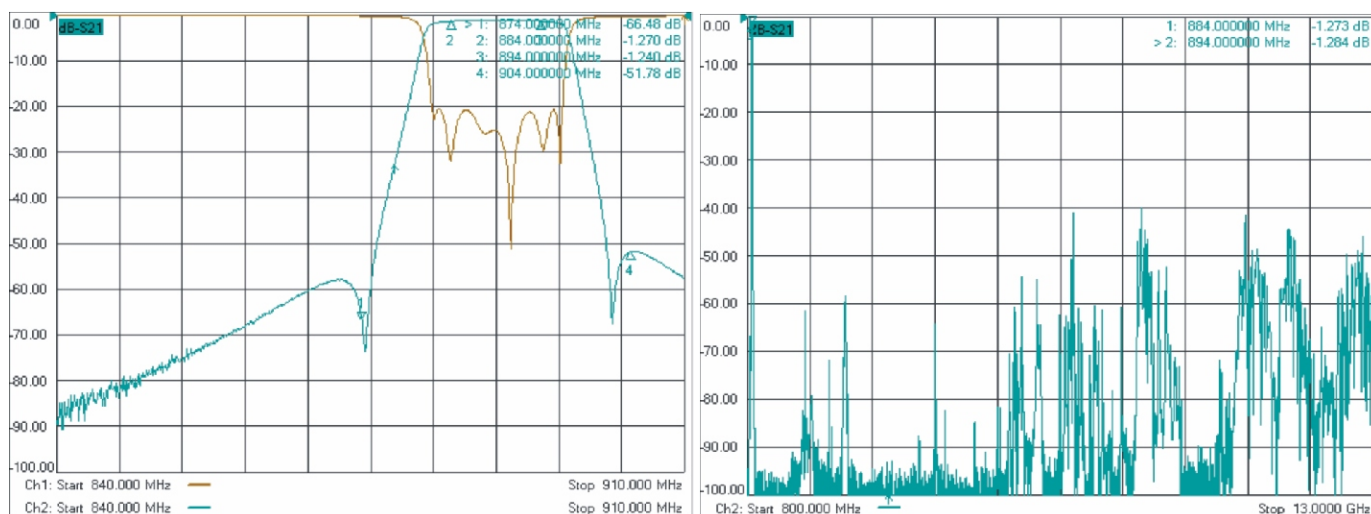

E-mail:  
sales@creowave.com

Web address  
www.creowave.com

Fax:  
+358 40 88 29 465

Phone:  
+358 40 86 86 300